

Huygens description of resonance phenomena in subwavelength hole arrays

C. Genet, M.P. van Exter, and J.P. Woerdman

Huygens Laboratory, Leiden University, P.O. Box 9504, 2300 RA Leiden, The Netherlands

We develop a point-scattering approach to the plane-wave optical transmission of subwavelength metal hole arrays. We present a *real* space description instead of the more conventional *reciprocal* space description; this naturally produces interfering resonant features in the transmission spectra and makes explicit the tensorial properties of the transmission matrix. We give transmission spectra simulations for both square and hexagonal arrays; these can be evaluated at arbitrary angles and polarizations.

Experiments have revealed the crucial role played by surface wave excitations (often called surface plasmons) in the case of extraordinary transmission features of nanoperforated metallic films¹. This experimental work has generated an important theoretical literature which can be grossly separated into two parts. A first category is based on *ab initio* fully numerical simulations of the scattering amplitudes of these nanoarrays; in this case, the interpretation of simulated spectra is often difficult^{2,3,4,5}. A second category is accordingly devoted to the search for physical understanding of the phenomenon^{6,7,8}. The main criticism that can be addressed to these interpretative papers is that they rely on the *a priori* definition of resonances as surface modes at a *smooth* interface (i.e. no holes) which are coupled to the incident field via momentum matching by the hole array.

The aim of this paper is to fill the intermediate gap with a simple model which allows both a clear physical description and straightforward simulations of transmission spectra. The main attractive features of our model are related to the fact that it is based on a *real* space (instead of a *reciprocal* space) surface wave scattering analysis. We stress that our work naturally produces transmission resonances and that it does so without invoking *a priori* wavevector matching between surface modes on a *smooth* interface and grating momenta, i.e. reciprocal lattice vectors. Most importantly, it reveals interference effects between neighbouring resonances, contrary to the usual reciprocal space (i.e. Fourier) description of wavevector matching. Our description makes explicit, among others, the polarization dependence and the tensorial properties of the transmission matrix. It describes the influence of the incident angle tuning on transmission spectra and, eventually, it naturally relates corresponding band structures to symmetries of the *reciprocal* lattice of the array. All these aspects are, for the sake of demonstration, best clarified in a rather simplified framework, as we will discuss below. This implies that we do not aim at quantitative agreement with experimental transmission spectra. Nevertheless, we feel that our model yields original physical insights into the dynamics of transmission through nanohole arrays.

Our approach is rooted in the role played by surface modes on the transmission process. The transmission process of a plane wave through sub-wavelength metallic

hole arrays will be cast into the context of a Huygens-type principle, where the array is discretized as a lattice of holes acting as point-scatterers that scatter the incident radiation coherently into two-dimensional secondary wavelets. Specifically, the array is contained in the (x, y) plane of a cartesian (x, y, z) frame and is illuminated by a paraxial plane wave of wavevector $\mathbf{k}_{\text{in}}$ and polarization vector $\hat{\mathbf{u}}_{\text{in}}$. This wave is described by far-field angles $\mathbf{k}_{\text{in}}/|\mathbf{k}_{\text{in}}| \sim (\theta_x, \theta_y, 1)$ and two electric field components $\mathbf{E} \sim (\mathbf{E}_x, \mathbf{E}_y)$, decomposed into the basis of the TE and TM polarizations. Retaining only the 0th diffraction order, the transmission can be formulated as $\mathbf{E}_{\text{out}}[\lambda, \theta] = \underline{\mathbf{t}} \cdot \mathbf{E}_{\text{in}}[\lambda, \theta]$ with a 2×2 transmission matrix $\underline{\mathbf{t}}[\lambda, \theta]$, λ being the wavelength and $\theta = (\theta_x, \theta_y)$ the far field angles of the incoming and outgoing field.

As schematically shown in fig.(1), we will distinguish two contributions to this transmission matrix^{5,9}. A first one, $\underline{\mathbf{t}}_{\text{Bethe}}$, wavelength dependent and proportional to the identity matrix, corresponds to a transmission of the incoming field directly through the holes, i.e. to a Bethe-type diffraction regime¹⁰. A second contribution, $\underline{\mathbf{t}}_{\text{Scatt}}$, corresponds to the resonant part of the transmission matrix, on which we focus hereafter. Fig.(1) describes this resonant transmission process as a three-step process: (i) the incident plane wave is converted into a surface wave at a given point scatterer, (ii) the surface wave propagates on the surface of the array and (iii) is eventually re-emitted as a plane wave through the array. Then, in




FIG. 1: Schematic representation of the scattering process, including the direct scattering contribution defined at a chosen origin of the lattice.

the spirit of Fresnel diffraction, the global resonant matrix $\underline{\mathbf{t}}_{\text{Scatt}}$, evaluated at the center ($\mathbf{0}$) of the array, is based on the *near-field* of the array, as the coherent re-summation over all the secondary surface wavelets emitted by each of the holes, acting as independent uncoupled

holes with elementary scattering matrices $\underline{\tau}$

$$\underline{\mathbf{t}}_{\text{Scatt}}(\mathbf{0}) = \sum_{\{\mathbf{r}_j\}} \underline{\tau}(\mathbf{0}, \mathbf{r}_j) \quad (1)$$

The summation is defined on the lattice distribution of holes $\{\mathbf{r}_j\}$. The singular term $\{\mathbf{r}_j = \mathbf{0}\}$ is related to the direct transmission channel of $\underline{\mathbf{t}}_{\text{Bethe}}$ and is therefore naturally excluded from this resonant part. As a periodic lattice, the array is coordinated by its two primitive vectors $(\mathbf{a}_1, \mathbf{a}_2)$. We restrict this paper to $|\mathbf{a}_1| = |\mathbf{a}_2| = a_0$ square and hexagonal lattices, as these symmetries are most popular experimentally^{11,12}. The position of each scattering hole on each of these lattices is defined as $\mathbf{r}_j = n\mathbf{a}_1 + m\mathbf{a}_2$ with (n, m) integers. The summation on Eq.(1) therefore corresponds to a double $(n, m) \neq (0, 0)$ summation over the lattice.

In this work, we calculate the $\underline{\tau}$ matrix from the dynamics of a scattered surface wave characterized by a complex transverse wavevector $|\hat{\mathbf{k}}| = (\eta_1 + i\eta_2)2\pi/\lambda$. On a *smooth* metal-dielectric interface (i.e. no holes), with dielectric functions $\varepsilon_1, \varepsilon_2$ respectively, theory predicts¹³

$$\eta_1 + i\eta_2 = \sqrt{\frac{\varepsilon_1 \varepsilon_2}{\varepsilon_1 + \varepsilon_2}} \quad (2)$$

Note that this expression holds for a metal-dielectric interface, from the visible to the microwave domain, but not for a dielectric-dielectric interface. In practice, the observed transmission resonances in metallic nanohole arrays are much broader than and red-shifted by typically a few percent from the mode dispersion on a smooth interface^{6,14,15}. These discrepancies are most likely related to direct Bethe-type transmission channel and to radiative losses of the surface waves when they scatter on the holes of the actual structure. In our simulations, we use realistic values for η_1 and η_2 (see below).

In our model, the polarization of each surface wave is taken along its propagation direction with a unitary polarization vector $\hat{\mathbf{u}}_j = \mathbf{r}_j/|\mathbf{r}_j|$. Surface polarization plays a crucial role, as it determines both the incoupling efficiency $\hat{\mathbf{u}}_j \cdot \hat{\mathbf{u}}_{\text{in}}$ between the free-space incident photons and the excited surface wave, as being proportional to their electric field overlap, and the polarization of the emitted radiation. The incoupling factor $\hat{\mathbf{u}}_j \cdot \hat{\mathbf{u}}_{\text{in}} = \cos \varphi$ corresponds to a two-dimensional dipole radiation pattern for the surface wave emitted at the hole; this pattern has been experimentally observed¹⁶. The full polarization behaviour is contained in the tensorial $\hat{\mathbf{u}}_j \otimes \hat{\mathbf{u}}_j$ nature of the elementary point-scattering matrix ($\otimes$ denotes a tensorial product).

We assume that the elementary scattering matrix $\underline{\tau}$ is spherical in the far-field so that it reads as

$$\underline{\tau}(\mathbf{0}, \mathbf{r}_j) = f(|\hat{\mathbf{k}}|) \frac{e^{i|\hat{\mathbf{k}}||\mathbf{r}_j|}}{\sqrt{|\mathbf{r}_j|}} e^{i\mathbf{k}_{\text{in}} \cdot \mathbf{r}_j} \hat{\mathbf{u}}_j \otimes \hat{\mathbf{u}}_j \quad (3)$$

The scattering amplitude is $f(|\hat{\mathbf{k}}|) = s(|\hat{\mathbf{k}}|)e^{-i\pi/4}\sqrt{\text{Re}(|\hat{\mathbf{k}}|)/2\pi}$ in the far-field approxima-

tion $|\hat{\mathbf{k}}||\mathbf{r}_j| \gg 1$ of the Huygens phase, being certainly satisfied for $\lambda \ll 2\pi a_0 \eta_1$. For simplicity, we neglect the frequency dependence of the shape factor $s(|\hat{\mathbf{k}}|)$ and, in the point-scattering limit, replace it by a constant s . This limits the discussion to spatial symmetries of the lattice. Point-group issues matter when specific shapes of the scatterers are introduced. Then, the scattering amplitude has to include a true $s(\hat{\mathbf{k}})$ shape factor. The coherence of the surface scattering is insured by the fixed phase relation $e^{i\mathbf{k}_{\text{in}} \cdot \mathbf{r}_j}$ with the incident field $\mathbf{k}_{\text{in}}$. Eventually, with an input plane wave $\mathbf{E}_{\text{in}} = E_{\text{in}}\hat{\mathbf{u}}_{\text{in}}$ and no polarization analysis in transmission, we evaluate the resonant part of the intensity transmission coefficient $T = |\underline{\mathbf{t}}_{\text{Scatt}} \cdot \hat{\mathbf{u}}_{\text{in}}|^2$.

In our simulations, we normalize the wavelength by $\lambda_0 = a_0 \eta_1$ and the transmission matrix by the constant scattering amplitude factor s . Internal damping and radiative losses of a surface wave propagating on the lattice are quantified with a single effective parameter $\eta = \eta_2/\eta_1$. This η determines the convergence speed of the scattering summation. For simplicity, we neglect the frequency dependence of both η_1 and η_2 and choose $\eta \sim 0.02$ which correspond to a constant mean free path of $a_0/(4\pi\eta) \sim 3 \mu\text{m}$ for $a_0 = 0.7 \mu\text{m}$ ¹⁷. Convergence is then easily reached with a lattice of 80×80 points. If the damping is lower, a larger lattice should be chosen. The frequency dependence of $\underline{\mathbf{t}}_{\text{Scatt}}$ is determined by running simulations for 800 wavelengths positioned on a regular grid ranging from $\lambda/\lambda_0 = 0.4$ to $\lambda/\lambda_0 = 1.2$. This interval is very large (factor of 3) but is nevertheless consistent with our model, avoiding both shorter wavelength where the direct transmission channel takes over the resonant one, and longer wavelength for which the far-field approximation might break down. These nominal parameters given, the evaluation of an element of the transmission matrix, at a given incidence angle, takes about 5 seconds for the whole spectrum.

As a first working example of our method, we present in fig.(2) a simulated spectrum of the transmission coefficient of a square array over the wavelength range mentioned above, under plane-wave illumination at normal incidence $\theta = 0$. In this case, both TE and TM polarizations are degenerate and the transmission matrix is simply proportional to the identity matrix. Our model immediately shows the resonant behaviour of the transmission spectrum. We stress again that we make here no use of the usual momentum conservation argument specifying resonances in terms of reciprocal lattice; the resonances arise naturally from the summation of Eq.(1).

The position and the relative strength of the peaks shown in the spectrum of fig.(2) can be understood from a Fresnel-zone type argument¹⁸. A resonance builds up each time the Huygens phase satisfies an in-phase condition, related to the definition of the reciprocal lattice. Resonances are thus expected at approximately the same positions predicted by the usual *ad hoc* dispersion

relation for surface waves on periodic arrays, that is at

$$\frac{\lambda_{\text{res}}}{\lambda_0} = \frac{1}{\sqrt{n^2 + m^2}} \quad (4)$$

for a square array and $\lambda_{\text{res}}/\lambda_0 = \sqrt{3}/2\sqrt{n^2 + nm + m^2}$ for a hexagonal array⁶. We adopt hereafter the convention of indexing a surface mode as $[n, m]$. The strength of the peaks scales with the corresponding inverse distance $1/\sqrt{n^2 + m^2}$. The increase in peak transmission for the $[2, 1]$ mode as compared to the $[2, 0]$ mode results from an increase in degeneracy from 4-fold to 8-fold, leading to a factor 2 increase in amplitude and a factor 4 in intensity. The spectrum in fig.(2) is shown in arbitrary units (a.u.) where, from Eq.(1), one hole at one lattice spacing contributes one arbitrary unit.

We note that the two-dimensional summation on a discrete two-dimensional lattice (see Eq.(1)) does not provide all in-phase conditions. For the square array, for instance, the in-phase conditions derived from Eq.(1) read as

$$2\pi\sqrt{n^2 + m^2}\frac{\lambda_0}{\lambda_{\text{res}}} = 2\pi p \quad (5)$$

with p a given positive integer. However, $n^2 + m^2$ can not provide all such p integers. For this reason, there is no resonance between the $[1, 1]$ and $[2, 0]$ modes of a square array, though such an in-phase condition could in principle be satisfied in between. This lack of resonances corresponds to a modification of the simple Fresnel-zone argument: with a two-dimensional lattice, the only multiplicities corresponding to resonant conditions are those matching the discretization of the lattice.

This picture is useful to understand the positions and strengths of the resonances. But we would like to stress that our *real* space-based model goes beyond that, producing interferences between surface modes that have a strong influence on the transmission spectrum. Peaks present asymmetries due to the interference of overlapping tails of adjacent resonances. These tails can even




FIG. 2: Transmission coefficient of a square array at normal incidence, as a function of normalized input wavelength.

interfere quite destructively as in between modes $[2, 1]$ and $[2, 0]$ (see fig.(2)). The interferences between the modal amplitudes make the actual position of the resonance $\lambda_{\text{res}}/\lambda_0$ slightly different from the “pure” location

$$1/\sqrt{n^2 + m^2}.$$

We have also investigated non-normal incidences that correspond to tilts along the y axis, for both square and hexagonal arrays (oriented with one lattice vector in the x -direction). Rotation angles ranging from 0° to $\sim 11.5^\circ$ in steps of $\sim 2.3^\circ$ were studied. TE and TM polarizations, now distinct, are displayed in separate figures. A central result of this paper, shown in figs.(3), is that our model immediately and naturally produces spectral band

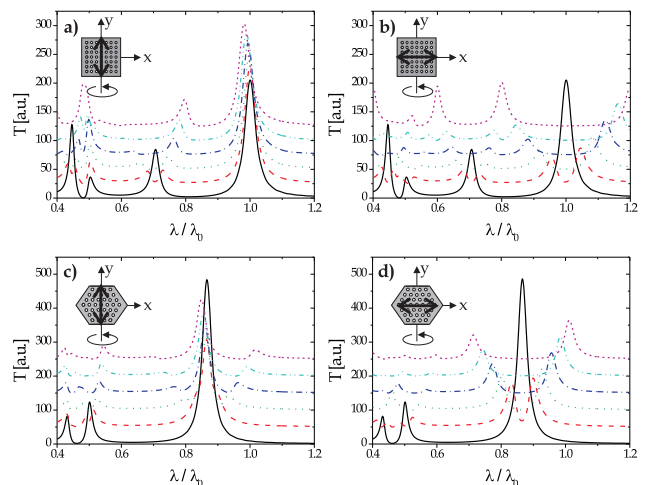


FIG. 3: Transmission spectra for a square array (first row) for a)TE and b)TM polarizations and for a hexagonal array (second row) for c)TE and d)TM polarizations. These spectra have been calculated as a function of normalized input wavelength and angle of incidence when the tilt is performed along the y -axis - see insets. For clarity, we show a globally shifted curve for each angular increment of $\sim 2.3^\circ$.

structures.

For a square array, illuminated with a TE polarized wave, the $[1, 0]$ resonance remains practically stationary, whereas it splits into a doublet for a TM polarization as the angle of incidence is increased. For the $[1, 1]$ mode, one observes a doublet splitting for both polarization. For a hexagonal array, the principal resonance splits into a triplet with a central peak for TE polarization, whereas it evolves into a doublet for TM polarization. Split resonances will eventually overlap, through their progressive shifts. This can lead to a destructive interference, as seen at an $\sim 11.5^\circ$ incidence angle on fig.(3, a)) between the $[1, 1]$ and $[2, 0]$ resonances for TE polarization or to a constructive interference, as seen on fig.(3, b)) between the $[1, 0]$ and $[1, 1]$ modes for TM polarization. One should also note that for both square and hexagonal arrays, central peaks are in fact only approximately stationary as the tilting angle is varied. With an increasing angle of incidence, a positive transverse component of the wavevector $\mathbf{k}_{\text{in}}$ emerges and leads to a slight blue shift of central peaks.

It is interesting to compare these simulations, and in

particular the splitting of resonances, with what could be expected from rather intuitive arguments. Intuitively, a nanohole array is simply characterized by the spatial symmetries of its *direct* lattice. The direction of propagation of a given surface mode will be naturally associated to a particular axis of this direct lattice, with an incoupling efficiency argument as presented above and based on the projection factor between such a propagation axis and the incident polarization. Thus, one forbids modes which propagate along directions perpendicular to the incident polarization to be excited. Within this intuitive frame, one predicts splitting of resonances by merely performing symmetry operations on the *direct* lattice as the array is tilted. It turns out however that following this line of reasoning leads to wrong predictions.

On the contrary, it is important to realize that the band structures of figs.(3) can only be fully inferred if one realizes that Eq.(1), starting indeed from point-scatterers on the *direct* lattice of the array, provides resulting waves that are directional and that propagate along axes of the *reciprocal* lattice rather than the *direct* one. Therefore, these band structures are only consistent with the symmetry arguments performed on the *reciprocal* lattice¹⁹, together with a polarization “selection-rule” killing surface waves that are allowed by symmetry to propagate on *reciprocal* lattice axes perpendicular to the incident polarization.

The disagreement with the intuitive approach mentioned above is not present for a square array since in this case, the direct lattice and the reciprocal lattice are identical. It is however easily visible for a hexagonal array for which direct and reciprocal lattices do not coincide. In this case, if one concentrates the symmetry arguments on the direct lattice, the expected splitting of resonances will not agree with simulations. For instance, symmetry arguments applied to a direct hexagonal lattice tilted along its y -axis lead to the prediction of quadruplet splitting with no stationary mode for the principal resonance, for both polarizations. The same argument applied to the *reciprocal* lattice, together with accounting for the projection factor between lattice axes and polarization, leads to a triplet, respectively a doublet, for TE, respectively TM, polarization; this is indeed observed in fig.(3, c)) and fig.(3, d)).

In conclusion, we have presented a simple and straightforward model based on a Huygens-type principle. This work provides physical insight into the surface-plasmon-assisted transmission process through metal nanohole ar-

rays, emphasizing symmetry and tensorial properties of the transmission amplitude. It yields band structures consistent with directional collective surface excitations propagating on the *reciprocal* lattice of the nanohole array and does not rely on any *ad hoc* momentum matching argument.

In order to stress the core characteristics of our Huygens description, we have used a simplified model that addresses the resonant contribution $\underline{t}_{\text{Scatt}}$ to the transmission through a single interface only and that does not account for the direct transmission channel contribution $\underline{t}_{\text{Bethe}}$. Our point-scattering approach amounts to considering the holes in the metallic film to be in the far subwavelength limit, i.e. basically in the limit of holes of zero diameter. To quantitatively compare with experimental data, the following extensions are needed: both the dielectric constant of the metal and the scattering amplitude $s(\hat{\mathbf{k}})$ require a frequency dependence. Furthermore, related in particular to hole size effects, this scattering amplitude should be specified and the direct contribution $\underline{t}_{\text{Bethe}}$ to the transmission should be included, providing resonance line shapes with red-shifts and red-tails⁹.

Of course, a qualitative agreement between our simulations and angle dependent transmission measurements should be easier to obtain, in particular as far as splittings of resonances are concerned. But discrepancies are already found at this less ambitious level when referring to experiments performed with standardly designed nanohole arrays⁶⁷. In fact, such nanohole arrays correspond to optical systems with two-interfaces, possibly identical in the case of free-standing films. There, angle dependent couplings between surface modes defined on each interface induce perturbations too strong to allow even a qualitative matching with the mere single-interface band structure provided by our model. Nevertheless, if one could design an effective single-interface nanoporous film, such a qualitative check should be possible. A metallic film, with very small holes, deposited on a given dielectric substrate with a thick titanium (Ti) bonding layer is likely to be a relevant candidate⁹. Strong absorption in this Ti layer prevents indeed any surface mode from being excited on this metal-dielectric interface, thus keeping only a single air-metal interface into play. In this framework therefore, it will be interesting to confront experimental transmission spectra with the Huygens description formulated in our paper.

¹ T. W. Ebbesen, H. J. Lezec, H. F. Ghaemi, T. Thio, and P. A. Wolff, *Nature* **391**, 667-669 (1998)

² E. Popov, M. Nevière, S. Enoch, and R. Reinisch, *Phys. Rev. B* **62**, 16100-16108 (2000)

³ L. Martín-Moreno, F. J. García-Vidal, H. J. Lezec, K. M. Pellerin, T. Thio, J. B. Pendry, and T. W. Ebbesen, *Phys. Rev. Lett.* **86**, 1114-1117 (2001)

⁴ S. Enoch, E. Popov, M. Nevière, and R. Reinisch, *J. Opt. A: Pure Appl. Opt.* **4**, S83-S87 (2002)

⁵ M. Sarrazin, J.-P. Vigneron, and J.-M. Vigoureux, *Phys. Rev. B* **67**, 085415-1 085415-8 (2003)

⁶ H. F. Ghaemi, T. Thio, D. E. Grupp, T. W. Ebbesen, and H. J. Lezec, *Phys. Rev. B* **58**, 6779-6782 (1998)

⁷ J.-M. Vigoureux, *Optics Commun.* **198**, 257-263 (2001)

- ⁸ S. A. Darmayan and A. V. Zayats, Phys. Rev. B **67**, 035424-1 035424-7 (2003)
- ⁹ C. Genet, M. P. van Exter, and J. P. Woerdman, Optics Commun. **225**, 331-336 (2003)
- ¹⁰ H. A. Bethe, Phys. Rev. **66**, 163-182 (1944)
- ¹¹ W. A. Murray, S. Astilean, and W. L. Barnes, Phys. Rev. B **69**, 165407-1 165407-7 (2004)
- ¹² E. Altewischer, C. Genet, M. P. van Exter, J. P. Woerdman, P. F. A. Alkemade, A. van Zuuk, and E. W. J. M. van der Drift, arXiv:physics/0405141
- ¹³ H. Raether, *Surface Plasmons on Smooth and Rough Surfaces and on Gratings* (Springer-Verlag, 1988)
- ¹⁴ L. Salomon, F. Grillot, A. V. Zayats, and F. de Fornel, Phys. Rev. Lett. **86**, 1110-1113 (2001)
- ¹⁵ A. Krishnan, T. Thio, T. J. Kim, H. J. Lezec, T. W. Ebbesen, P. A. Wolff, J. Pendry, L. Martin-Moreno, and F. J. Garcia-Vidal, Optics Commun. **200**, 1-7 (2001)
- ¹⁶ B. Hecht, H. Bielefeldt, L. Novotny, Y. Inouye, and D. W. Pohl, Phys. Rev. Lett. **77**, 1889-1892 (1996)
- ¹⁷ E. Altewischer, M. P. van Exter, and J. P. Woerdman, Nature **418**, 304-306 (2002)
- ¹⁸ M. Born and E. Wolf, *Principles of Optics* (Cambridge University Press, 1975)
- ¹⁹ E. Altewischer, M. P. van Exter, and J. P. Woerdman, J. Opt. Soc. Am. B **20**, 1927-1931 (2003)